
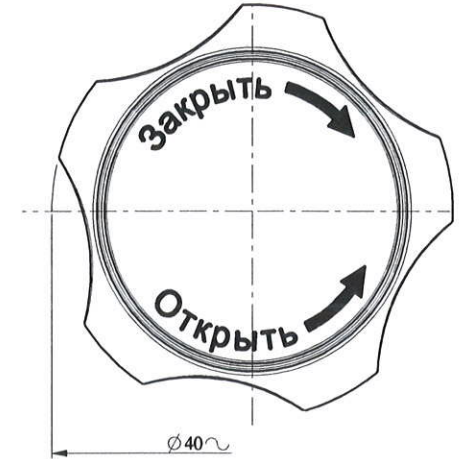


## Chromium plated valve

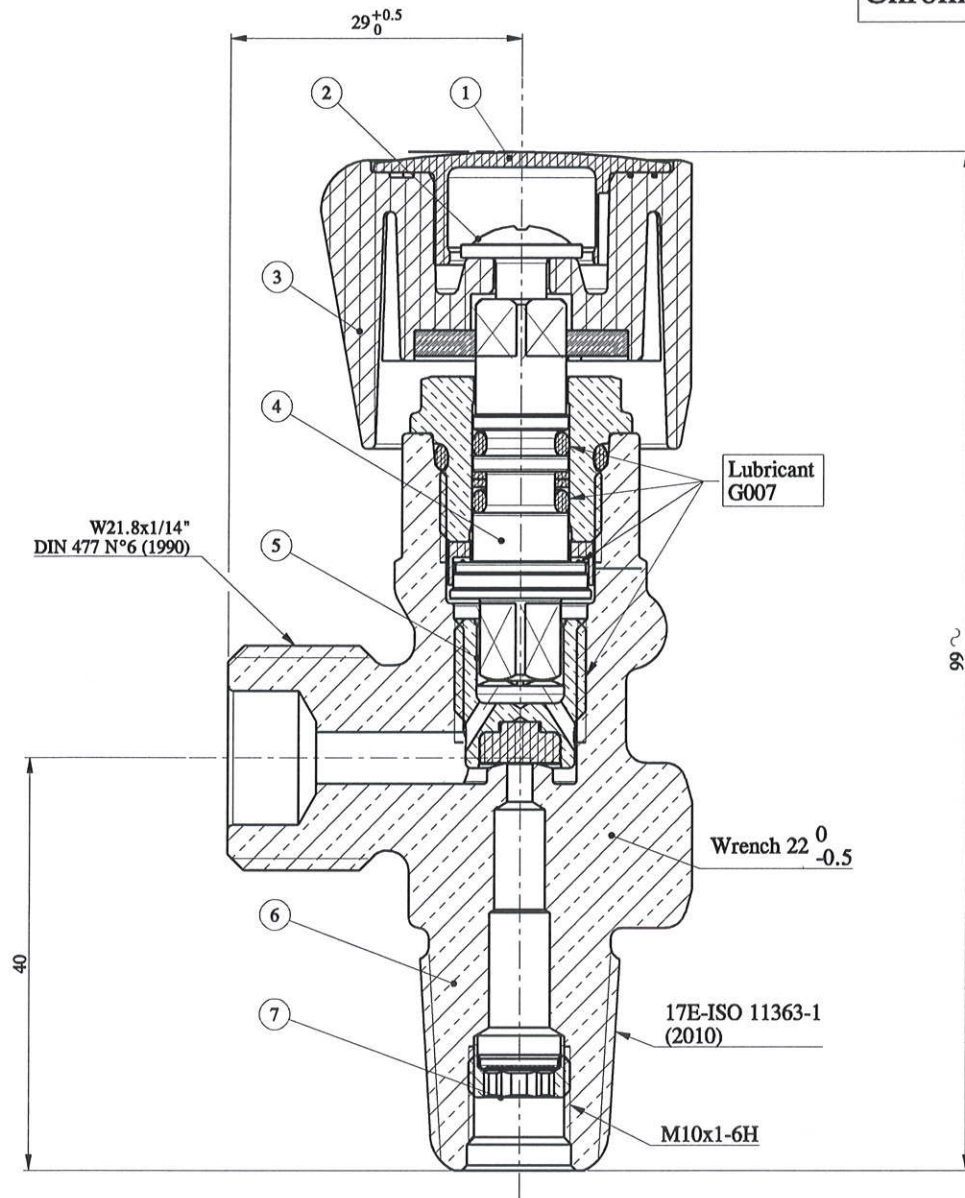

**Markings:**

- CAVAGNA GROUP symbol
- EU
- ISO V
- 17E
- W21.8 DIN6
- Year and month of construction.  
(Ex.:2012/01)
- O<sub>2</sub>
- -40°C
- ..... (Production order)
- T/CE 0029

Temperature range: -40° +65°C  
 Gland nut closure torque: 45-55 Nm  
 Orifice: Ø2.5 mm.  
 W.P. 230 bar  
 HOMOLOGATION : L. 30.282

Materials:  
 Seat Pad: PA 66  
 Toroidal ring: EPDM  
 Antifricition ring: PEEK  
 Antiextrusion ring: PTFE

7	Filter	1	/	107950009
6	Chromed MIGNON Body E:17E U:DIN 477 N°6	1	Cu Zn40 Pb2 (CW617N) EN 12165	0171686213
5	Assembled piston	1	/	0379500043
4	Assembled nichel plated spindle	1	/	1379500063
3	Assembled handwheel	1	/	0279500017
2	Screw	1	Zinc-coated steel	1471101029
1	Protection cap (Russia)	1	PA 6	1671705579
POS	DENOMINATION	Q.	MATERIAL	DRAW NR.

DESCRIPTION		K2000 Valve for O2 Med. 17E-W21.8 DIN477/6 Cr				
 cavagna group pergola	GEN. TOLL. ±/	GEN. FILL. R /	ANG. TOLL. ±/	DRAFT /	SCALE 2:1	SHEET 1 /1
	RESPONS.	DRAWN	ISSUE	MATERIAL		
	DATE	16-04-12	16-04-12	/		
	SIGNATURE	Frerini	Cazzago	DRAW NUMBER		
ACTIVITY	NUMBER	PROJECT	REFERENCE	VOO1SOS026		
	10154	10154	-			
	SIGN. Cazzago					
	INDEX	AO	0.295 Kg	XXXXXX		